




**ruutu**

**GEOMETRIC HEXX**

Geometric Hexx gives you a wide range of vibrant and monochrome colourways enabling you to create a complex or coordinated geometric design. Great choice for creating feature area's and playful design schemes.

Heavy Contract  
Designer Carpet Tile

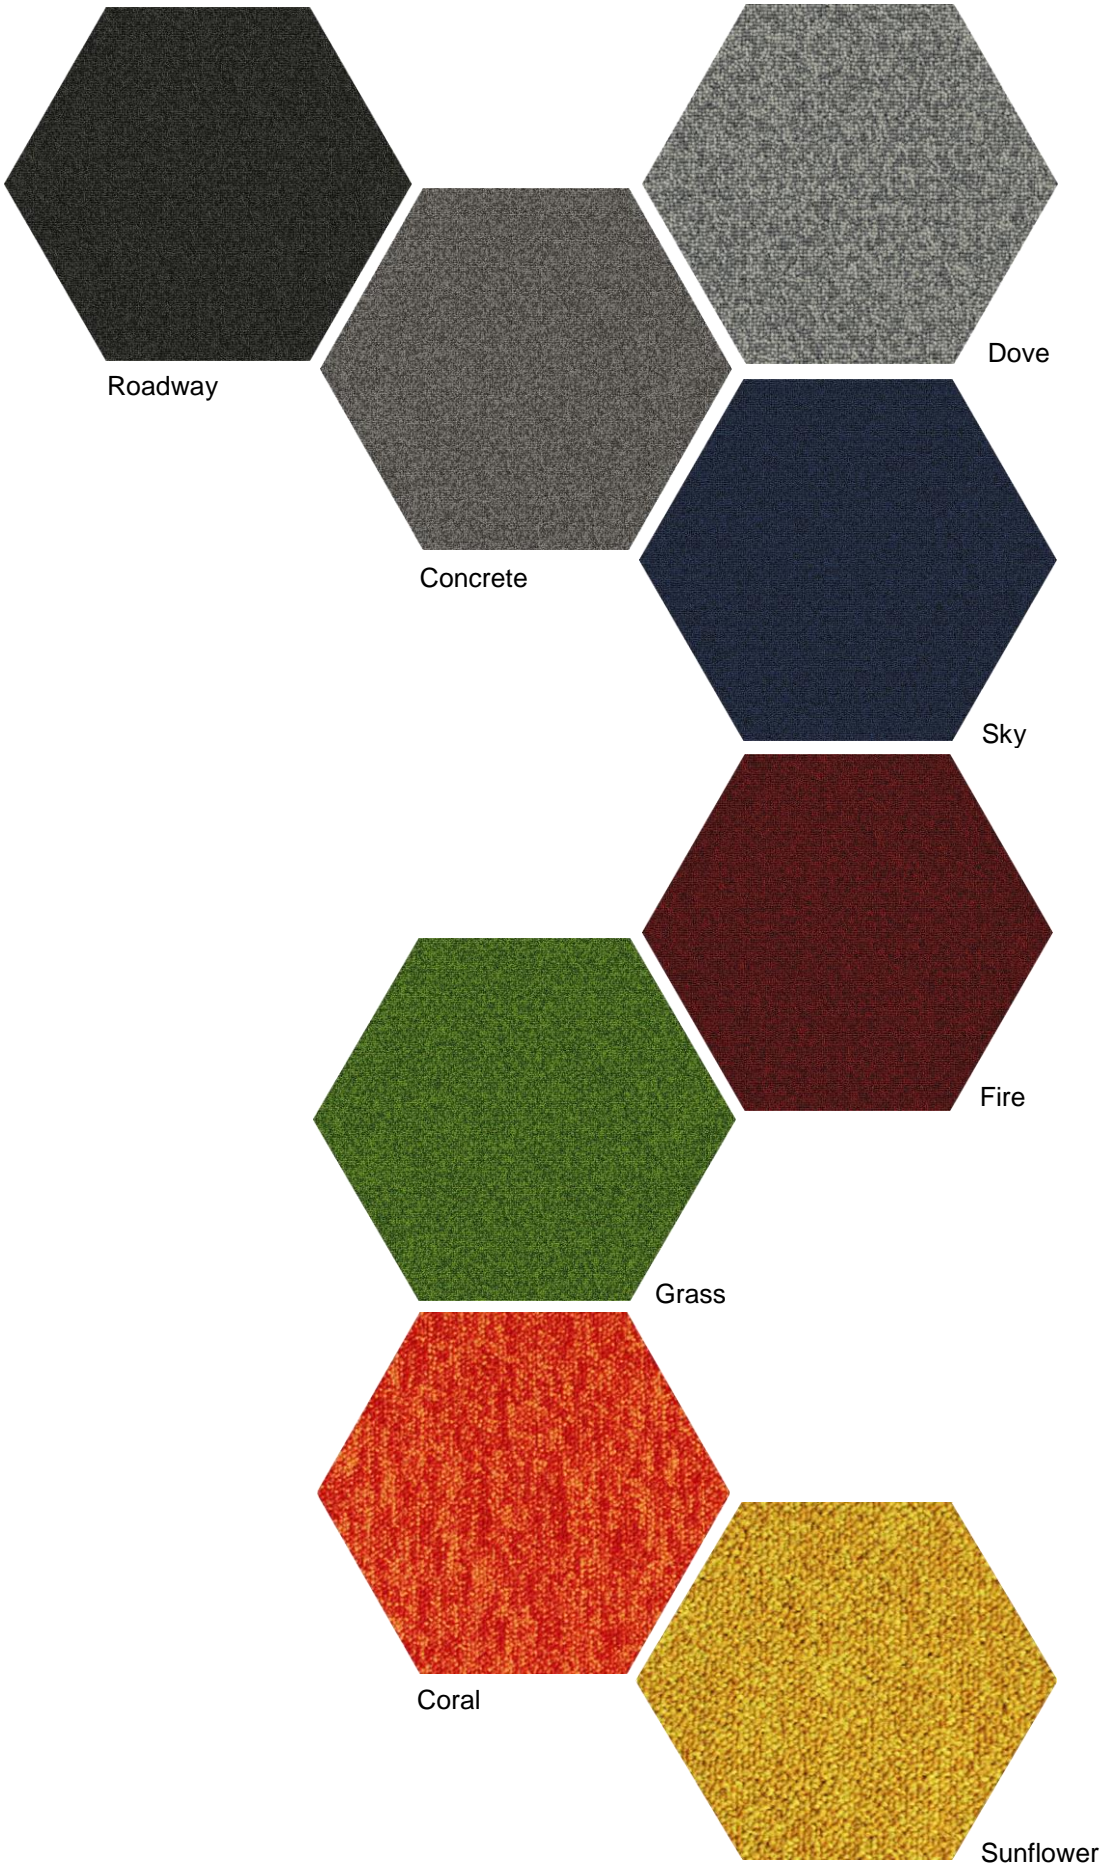



INSTALL INSPIRATION

**ruutu**

GEOMETRIC HEXX

# RUUTU GEOMETRIC HEXX

When looking at design and architecture, it's always reflected with some form of geometric shapes and pattern. We wanted to bring you a collection of colourways that looks monochrome from afar whilst giving that geometric impact and the purity of shape and detail when within close range.

- **Heavy Wear** - Geometric Hexx has a 10year commercial wear guarantee and is 550gr/m<sup>2</sup> which is designed to give excellent functionality in heavy wear areas
- **Design & Appearance** - With a colour palette of 8 carefully selected shades and more available as non-stock, create your visually impactful design with endless hexagonal pattern options.

## TECHNICAL SPECIFICATION

Construction	: Level Loop
Pile Fibre	: PA 6.0 Invista Antron
Machine Gauge	: 5/64 gauge
Tufts/m <sup>2</sup>	: 198 400
Pile Weight	: 550g/m <sup>2</sup>
Pile Height	: 3.0-3.5mm
Total Thickness	: 5.3mm
Tile Size	: 500 X 435mm
Total Weight	: 4850g/m <sup>2</sup>
Secondary Back	: P-bac
Impact Sound Reduction	: ≥24dB
Use Classification	: 33
Flammability	: Bfl-s1
No of tiles per box	: 20
Area of Use	: Commercial Heavy Duty
Dimension Stability	: Less than 0.2% variation
Colour Fastness	: 10 year warranty
Anti Static	: Lifetime protection ≤2.0KV

- 10 years Warranty
- manufacturing defect
  - Electrostatic propensity
  - Excessive wear
  - Dimensional stability
  - Castor Chair

### General

Recommended maintenance: Best results are obtained when cleaned with a dry shampoo method.

Pile direction: Directional arrows are printed on the back of each tile, can be laid Monolithic or Non-Directional for best effect.

Laying instructions: RUUTU flooring products are to be installed in full accordance with recommended installation instructions. It is advisable to install using tackifier or spray adhesive.

RUUTU reserves the right to amend this specification without giving prior notice. For the latest version of the technical specifications email [team@ruutu.co.uk](mailto:team@ruutu.co.uk).

*Please email [team@ruutu.co.uk](mailto:team@ruutu.co.uk) for further product details or sample requests.*

