

ruutu


SAFE GRIP

Safe Grip is a popular safety vinyl collection combining the assurance of sustainable slip resistance with high performance durability. Available in modern designs suited for healthcare, education and other clinical environments.


High Performance
Safety Floor Covering




SA1001

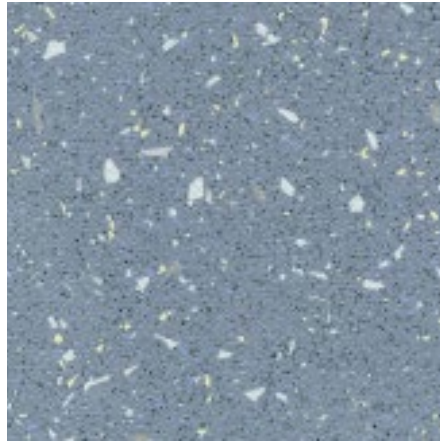


SA1002

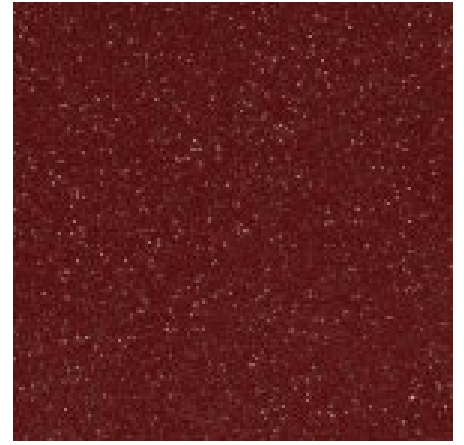


SA1003

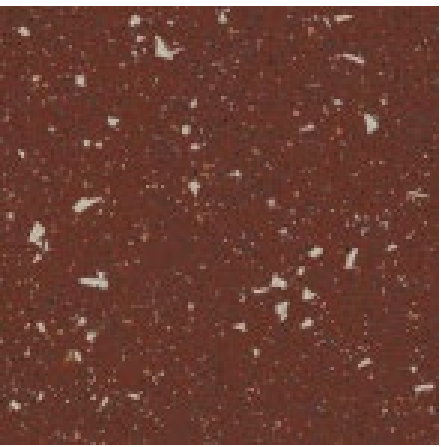

SA1004

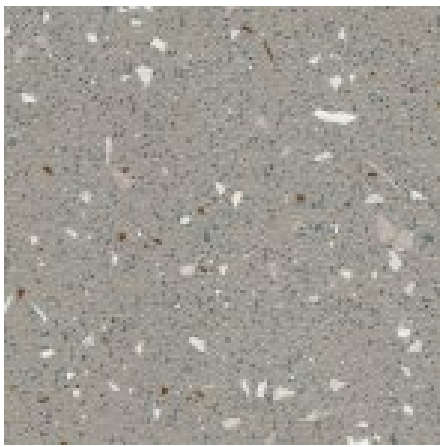


SA1005

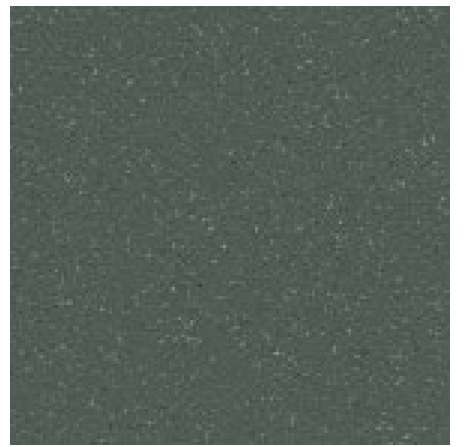

SA1006




SA1007

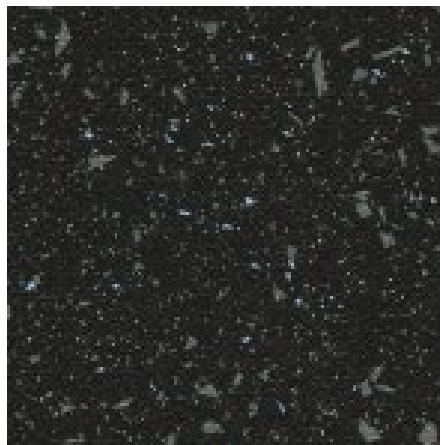


SA1008




SA1009

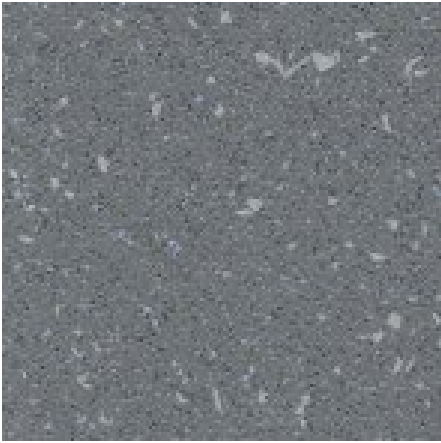


SA10010

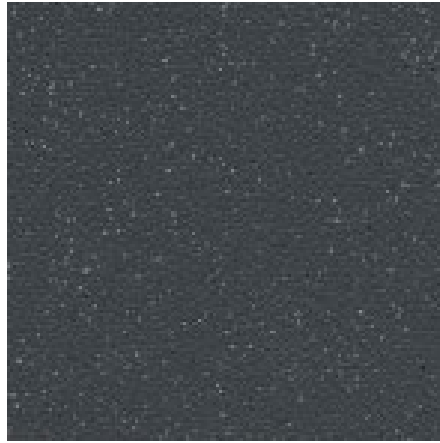


SA10011

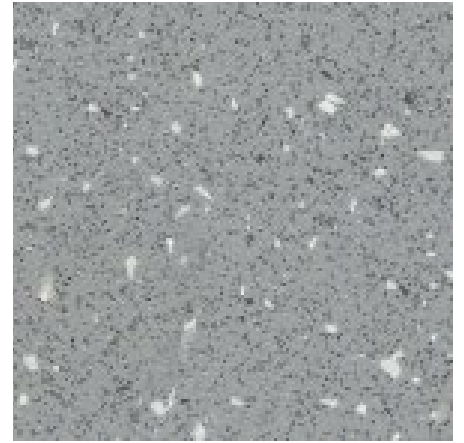


SA10012

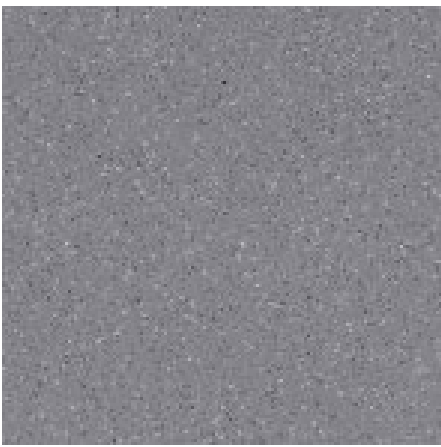

SA10013

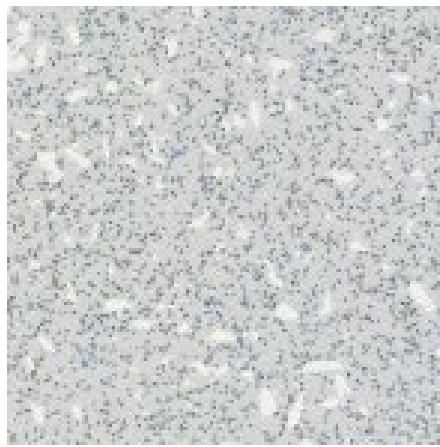


SA10014

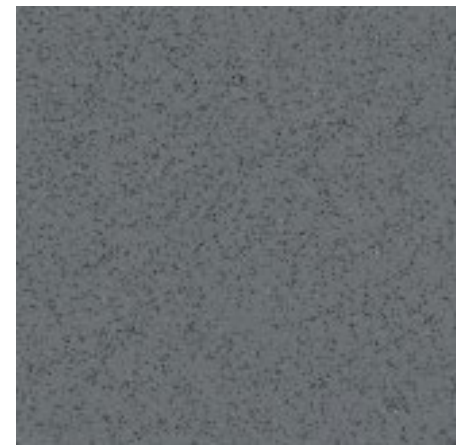

SA10015



SA10016

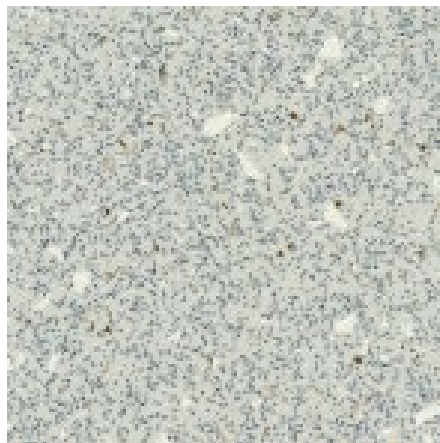

SA10017

RUUTU SAFE GRIP

Safe Grip is produced in 9 plain colours and 9 colours with multi-coloured flakes giving a wide selection of practical design options. A cost effective anti-slip sheet vinyl offering which is dimensionally stable and anti-bacterial.

DESCRIPTION

Construction		compact heterogeneous
Total thickness	EN 428	2.0mm
Wear layer thickness	EN 429	0.7mm
Width of roll	EN 426	2m
Length of roll	EN 426	20lm
Total weight	EN 426	2.7kg/m

CLASSIFICATION

Product specification	EN 649	YES
European classification	EN 685	class 34/43
Residual indentation	EN 433	0.1 max. mm
Dimensional stability	EN 434	0.2
Light fastness	EN 20105 B02	grade 6

PERFORMANCE


Abrasion group	MSZ EN 660-1	class T
Fire resistance	EN 13501-1	class Bfl-s1
	DIN 4102/ÖNORM	B1
	ASTM E 648 / 662	class 1/pass
	GOST 30402-94	G1
Slip resistance	DIN 51130	R10
	ASTM D2047-99	dry: 0.92 /wet: 0.84
Abrasion resistance	ISO 9352	-0.25 g/1000 circle
	ASTM D3884-01	0.19 g/1000 circle
Shore A hardness	ISO 868	90
Chemical resistance	EN 423	YES
	ASTM F925-02	YES
Bacterial resistance	EN ISO846:1999	YES
Castor chair resistance	EN 425	YES
Surface treatment		CLP
Antibacterial fungicid treatment		graboSAN
Environmental attributes		Solvent and heavy metal free product
Seaming method		Heat or cold weld
CE MARKING	EN 14041	

PREPARATION AND INSTALLATION

Excellent slip resistance, Cost effective, Great color range, Dimensionally stable, Anti-bacterial, 7 year warranty

CONSTRUCTION

- Easy Care wear layer
- Glass fibre reinforcement
- PVC backing

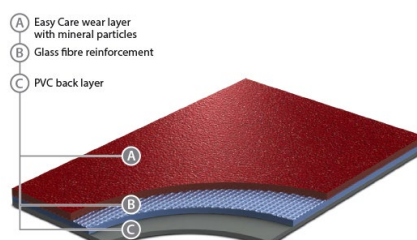

Please contact team@ruutu.co.uk for care and maintenance and installation guides



ruutu.co.uk

+44 (0)20 3633 5112
team@ruutu.co.uk



London Design Studio

121-131 Rosebery Avenue,
Clerkenwell,
London, EC1R 4RF
team@ruutu.co.uk

Finland Design Studio

Bulevardi 21
Helsinki, 00180
Finland
team@ruutu.eu

Amsterdam Design Studio

Vijzelstraat 68
Amsterdam, 1017 HL
Netherlands
team@ruutu.eu

Copenhagen Design Studio

Ny Carlsberg Vej 80
Copenhagen, 1799
Denmark
team@ruutu.eu

New York Design Studio

424-434 West 33rd Street,
New York City, New York
10001
team@ruutu.us